



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C11D 7/08, 7/18, 7/38	A1	(11) International Publication Number: WO 98/11191 (43) International Publication Date: 19 March 1998 (19.03.98)
(21) International Application Number: PCT/US97/16380 (22) International Filing Date: 10 September 1997 (10.09.97) (30) Priority Data: 96870117.7 13 September 1996 (13.09.96) EP (34) Countries for which the regional or international application was filed: BE et al. (71) Applicant (for all designated States except US): THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): SCIALLA, Stefano [IT/IT]; Via F.B. Rastrelli, 81, I-00128 Rome (IT). MASOTTI, Valentina [IT/IT]; Via Pertini, 5, I-40033 Casalecchio di Reno (IT). (74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: PEROXYGEN BLEACHING COMPOSITIONS COMPRISING PEROXYGEN BLEACH AND ATMP, SUITABLE FOR USE AS A PRETREATER FOR FABRICS		
(57) Abstract The present invention relates to aqueous, acidic compositions comprising a peroxygen bleach and ATMP. The present invention further encompasses a process for pretreating soiled fabrics whereby the loss of tensile strength in said fabric is reduced and the color/dye damage of said fabric is reduced.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PEROXYGEN BLEACHING COMPOSITIONS COMPRISING
PEROXYGEN BLEACH AND ATMP, SUITABLE FOR
USE AS A PRETREATER FOR FABRICS

Technical Field

The present invention relates to bleach-containing compositions suitable for use as pretreater and to a pretreatment process whereby fabric safety and/or color safety is improved. The liquid compositions of the invention are also very stable, and the preferred bleaching compositions herein are acidic.

Background of the Invention

Bleaching compositions have been extensively described in laundry applications as laundry detergents, laundry additives or even laundry pretreaters.

Indeed, it is known to use such bleach-containing compositions in laundry pretreatment applications to boost the removal of encrusted stains/soils and "problem" stains, such as grease, coffee, tea, grass, mud/clay-containing soils, which are otherwise particularly difficult to remove by typical machine washing. However, a drawback associated with such bleach-containing compositions is that said compositions may damage fabrics, resulting in dye damage and/or loss of tensile strength of the fabric fibers, especially when used in pretreatment applications under stressed conditions, e.g. when applied directly onto the fabric and left to act onto said fabric for prolonged periods of time before washing said fabrics, especially when the fabric to be treated contains metal ions such as copper, iron, manganese, or chromium. Without being

limited by theory, it is believed that peroxygen bleach can be responsible for the dye and fabric damage associated with these bleaching compositions. It is furthered believed that these metal ions on the surface of the fabrics, especially on cellulosic fabrics, catalyze the decomposition of peroxygen bleaches like hydrogen peroxide. Thus, the decomposition of the peroxygen bleach can result in fabric and/or dye damage.

When said compositions are applied directly to fabrics, the different components in said compositions diffuse or migrate, possibly at different rates, through the fabric fibers. This is also true for the peroxygen bleach component of bleaching compositions designed for the pretreatment of fabrics.

Now a solution to the damage resulting from pretreating fabrics with bleaching compositions comprising peroxygen bleach is provided by adding a certain fabric protection agent which acts to reduce fabric and/or dye damage. This fabric protection agent, aminotri(methylene phosphonic acid) - hereinafter ATMP - has been found to considerably reduce the damage associated with the treatment of fabrics with peroxygen bleach-containing compositions, especially those fabrics which are contaminated with metal ions.

Accordingly, the present invention solves the long-standing need for an effective, bleaching composition suitable for use as a pretreater which does not promote damage to fabrics. Moreover, the compositions of the present invention provide excellent performance when used in other applications apart from laundry pretreater application, such as in other laundry applications, as a laundry detergent or laundry additive, or even in hard surface cleaning applications or in carpet cleaning applications.

In the preferred compositions of the invention, which are liquid compositions, ATMP further provides the benefit of exceptional chemical stability for the peroxygen bleach.

Background Art

Peroxygen bleach-containing compositions have been extensively described in the art. For example EP-629,691A discloses emulsions of nonionic surfactants comprising a silicone compound, and as optional ingredients, hydrogen peroxide, or a water soluble source thereof. EP-629,690A discloses emulsions of nonionic surfactants comprising a terephthalate-based polymer, and as optional ingredients, hydrogen peroxide, or a water soluble source thereof. EP-209,228B discloses compositions comprising a peroxide source like hydrogen peroxide. EP-209,228B discloses that the hydrogen peroxide-containing compositions may be used as pre-spotters. See also U.S. Pat. No. 4,891,147, issued Jan. 2, 1990, and U.S. Pat. No. 5,019,289, issued May 28, 1991. Compositions comprising ATMP in a laundry context have been disclosed in EP 517 605, DD 280 783 and DD 280 784, however the compositions herein do not comprise a peroxygen bleach.

Summary of the Invention

The present invention encompasses a composition comprising a peroxygen bleach, such as hydrogen peroxide or a source thereof, and ATMP. Preferred compositions are liquid aqueous compositions which have a pH of from greater than 0 to about 6 and a viscosity of 1 cps or greater, preferably from about 50 to about 2000 cps, at 20°C when measured with a Brookfield viscometer at 50 rpm with a spindle no. 3.

The present invention further encompasses a process of pretreating soiled fabrics with a liquid, aqueous composition comprising a peroxygen bleach and ATMP, preferably in its neat form, onto the fabric and allowing said composition to remain in contact with said fabric, preferably without leaving said composition to dry on the fabric, before said fabric is washed.

By "pretreat soiled fabrics" it is to be understood that the aqueous composition is applied in its neat form onto the soiled fabric and left to act onto said fabric before said fabric is washed. Alternatively, the

aqueous composition may be applied to the fabric substrate along with enough water to wet the fabric.


All percentages, ratios, and proportions herein are by weight of total liquid composition, unless otherwise specified. All documents cited are incorporated herein by reference.

Detailed Description of the Invention

The present invention encompasses a composition comprising a peroxygen bleach, and ATMP. ATMP has been found to considerably reduce the damage associated with the treatment of fabrics with peroxygen bleach-containing compositions, especially those fabrics which contain metal ions, such as copper, iron, chromium, and manganese.

Fabric Protection Agent

As the fabric protection agent, the compositions herein comprise ATMP, i.e. the compound of formula :

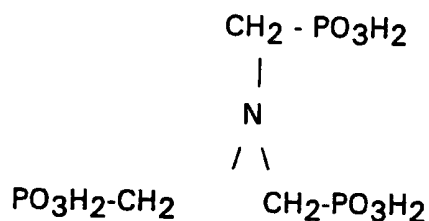

Preferably, the compositions herein will comprise from about 0.005% to about 5.0%, more preferably from about 0.01% to about 1.0%, by weight of the total bleaching composition of ATMP.

The preferred compositions according to the present invention are aqueous liquid cleaning compositions. Said aqueous compositions should be formulated in the acidic pH, preferably at a pH of from greater than 0 to about 6 and more preferably at a pH of from 3 to 5. Formulating the compositions of the present invention in the acidic pH range contributes to the stability of said compositions. The pH of the

compositions of the present invention can be adjusted by using organic or inorganic acids or bases.

Tensile strength test method - By "fabric damage" herein is meant the degree of tensile strength loss of a fabric. The tensile strength loss of fabrics can be determined by the following: Krefeld cotton ribbons (dimension 12.5 x 5 cm²) having a copper(2+) concentration of 30 ppm per gram of cotton are treated with 2 ml of the test composition according to Example I. The test composition is left in contact with the ribbons for 24 hours. The ribbons are then rinsed with water, and the tensile strength loss measured with an INSTRON, model no. 4411. Damage on the cotton ribbons is evaluated by stretching said ribbons until they break. The force necessary to break the ribbons, i.e. the Ultimate Tensile Stress, is measured while the ribbons are wet with a INSTRON, model 4411. The lower the force needed to break the cotton ribbons, the more serious is the damage caused on the fabrics. A good confidence (standard deviation = 2-4 Kg) in the results is obtained using five replicates for each test.

Peroxygen Bleach - An essential element of the compositions of the present invention is peroxygen bleach. A preferred peroxygen bleach herein is hydrogen peroxide or a water soluble source thereof or mixtures thereof. Hydrogen peroxide is most preferred. Indeed, the presence of peroxygen bleach, preferably hydrogen peroxide, provides strong cleaning benefits which are particularly noticeable in laundry applications. As used herein, a hydrogen peroxide source refers to any compound which produces hydrogen peroxide when said compound is in contact with water.

Suitable water-soluble sources of hydrogen peroxide for use herein include sodium carbonate peroxyhydrate or equivalent percarbonate salts, persilicate, perborates, e.g., sodium perborate (any hydrate but preferably the mono- or tetra-hydrate), sodium pyrophosphate peroxyhydrate, urea peroxyhydrate, sodium peroxide, and mixtures thereof. Alternative peroxygen sources include persulfates such as monopersulfate, peroxyacids such as diperoxydodecandioic acid (DPDA),

magnesium perphthalatic acid, perbenzoic and alkylperbenzoic acids, and mixtures thereof.

An "effective amount" of a peroxygen bleach is any amount capable of measurably improving soil/stain removal from the soiled fabric substrate compared to a peroxygen bleach-free composition when the soiled substrate is washed by the consumer in the presence of alkali. Typically, the compositions of the present invention comprise from 0.5% to 20% by weight of the total composition of said peroxygen bleach, preferably from 1% to 15% and most preferably from 2% to 6%.

Optional Bleach Activators - The peroxygen-containing compositions herein may optionally, but preferably, further comprise a bleach activator. By bleach activator, it is meant herein a compound which reacts with hydrogen peroxide to form a peracid. The peracid thus formed constitutes the activated bleach. Particularly preferred is acetyl triethyl citrate. Said bleach activators, if present, will typically comprise from about 0.5% to about 20%, preferably from 2% to 10%, most preferably from 3% to 7%, by weight of the total composition.

Bleach activators suitable herein are any known activators typified by NOBS (nonanoyl oxybenzenesulfonate), TAED (tetraacetylenediamine), or ATC (acetyl triethyl citrate). Numerous other bleach activators are known. See for example activators referenced in U.S. Patent 4,915,854, issued April 10, 1990 to Mao et al, and U.S. Patent 4,412,934. See also U.S. 4,634,551 for other typical conventional bleach activators. Also known are amido-derived bleach activators of the formulae: $R^1N(R^5)C(O)R^2C(O)L$ or $R^1C(O)N(R^5)R^2C(O)L$ wherein R^1 is an alkyl group containing from about 6 to about 12 carbon atoms, R^2 is an alkylene containing from 1 to about 6 carbon atoms, R^5 is H or alkyl, aryl, or alkaryl containing from about 1 to about 10 carbon atoms, and L is any suitable leaving group. Further illustration of bleach activators of the above formulae include (6-oct-anamidocaproyl)-oxybenzenesulfonate, (6-nonanamidocaproyl)oxybenzenesulfonate, (6-decanamidocaproyl)oxybenzenesulfonate, and mixtures thereof as described in U.S. Patent 4,634,551. Another class of bleach activators

comprises the benzoxazin-type activators disclosed by Hodge et al in U.S. Patent 4,966,723, issued October 30, 1990. Still another class of bleach activators includes acyl lactam activators such as substituted and unsubstituted benzoyl caprolactam, t-butyl-benzoylcaprolactam, n-octanoyl caprolactam, 3,5,5-trimethylhexanoyl caprolactam, nonanoyl caprolactam, decanoyl caprolactam, undecenoyl caprolactam, octanoyl valerolactam, decanoyl valerolactam, undecenoyl valerolactam, nonanoyl valerolactam, 3,5,5-trimethylhexanoyl valerolactam, t-butyl-benzoylvalerolactam and mixtures thereof.

Preferred bleach activators useful herein include those selected from the group consisting of acetyl triethyl citrate, n-octanoyl caprolactam, 3,5,5-trimethylhexanoyl caprolactam, nonanoyl caprolactam, decanoyl caprolactam, n-octanoyl valerolactam, 3,5,5-trimethylhexanoyl valerolactam, nonanoyl valerolactam, decanoyl valerolactam, nitrobenzoyl caprolactam, nitrobenzoyl valerolactam, and mixtures thereof. Particularly preferred are the bleach activators which are liquid or oil at room temperature. Examples of liquid bleach activators are acetyl triethyl citrate, n-octanoyl caprolactam, 3,5,5-trimethylhexanoyl caprolactam, nonanoyl caprolactam, decanoyl caprolactam, and mixtures thereof. The present compositions can optionally comprise aryl benzoates, such as phenyl benzoate.

Pretreatment Process - Although preferred application of the compositions described herein is laundry pretreatment, the compositions according to the present invention may also be used as a laundry detergent or as a laundry detergent booster and as a household cleaner in the bathroom or in the kitchen, for the cleaning of dishes or carpets.

Said liquid composition may remain in contact with the fabric, typically for a period of 1 minute to 24 hours, preferably 1 minute to 1 hour, and more preferably 5 minutes to 30 minutes, or so as to avoid drying of the liquid composition on the fabric. Optionally, when the fabric is soiled with encrusted stains/soils which otherwise would be relatively difficult to remove, the liquid compositions according to the present invention may be rubbed and/or brushed, for example, by means

of a sponge or a brush or simply by rubbing two pieces of fabric each against the other.

By "washing" it is to be understood herein to simply rinse the fabrics with water, or the fabrics may be washed with conventional compositions comprising at least one surface active agent, this by the means of a washing machine or simply by hand.

By "in its neat form" it is to be understood that the liquid compositions described herein are applied onto the fabrics to be pre-treated without undergoing any dilution, i.e. they are applied as described herein.

Other Conventional Ingredients for Cleaning Compositions - The bleaching compositions herein typically will also comprise other optional conventional ingredients to improve or modify performance. Typical, non-limiting examples of such ingredients are disclosed hereinafter for the convenience of the formulator.

Organic Stabilizers - The compositions herein may also optionally contain organic stabilizers for improving the chemical stability of the composition, provided that such materials are compatible or suitably formulated. Organic stabilizers can be selected from the following group: monophenols such as 2,6-di-*tert*-butylphenol or 2,6-di-*tert*-butyl-4-methylphenol; diphenols such as 2,2'-methylenebis(4-methyl-6-*tert*-butylphenol) or 4,4'-methylenebis(2,6-di-*tert*-butylphenol); polyphenols such as 1,3,5-trimethyl-2,4,6-tris(3',5'-di-*tert*-butyl-4-hydroxybenzyl)benzene; hydroquinones such as 2,5-di-*tert*-amylhydroquinone or *tert*-butylhydroquinone; aromatic amines such as *N*-phenyl-*N'*-(1,3-dimethylbutyl)-*p*-phenylenediamine or *N*-phenyl- α -naphthylamine; dihydroquinolines such as 2,2,4-trimethyl-1,2-dihydroquinoline; ethane-1-hydroxy-1,1-diphosphonate and other known phosphonates (see, for example, U.S. Patents 3,159,581; 3,213,030; 3,422,021; 3,400,148 and 3,422,137), and mixtures thereof.

Organic stabilizers are typically used in the present compositions at levels from 0.01% to 5.0%, more preferably from 0.05% to 0.5%.

The peroxygen bleach-containing compositions according to the present invention may further comprise from 0.5% to 5%, preferably from 2% to 4% by weight of the total composition of an alcohol according to the formula $\text{HO} - \text{CR}'\text{R}'' - \text{OH}$, wherein R' and R'' are independently H or a C2-C10 hydrocarbon chain and/or cycle. Preferred alcohol according to that formula is propanediol.

Inorganic Stabilizers - Examples on inorganic stabilizers include sodium stannate and various alkali metal phosphates such as the well-known sodium tripolyphosphates, sodium pyrophosphate and sodium orthophosphate.

Deterative Surfactants --Surfactants are useful herein for their usual cleaning power and may be included in preferred embodiments of the instant compositions at the usual detergent-useful levels. Generally, surfactants will comprise from about 0.1% to about 50%, preferably from about 1% to about 30%, more preferably from about 5% to about 25%, by weight of the bleaching compositions herein.

Nonlimiting examples of surfactants useful herein include the conventional C₁₁-C₁₈ alkylbenzene sulfonates ("LAS") and primary, branched-chain and random C₁₀-C₂₀ alkyl sulfates ("AS"); the C₁₀-C₁₈ secondary alkyl sulfates of the formula $\text{CH}_3(\text{CH}_2)_x(\text{CHOSO}_3^- \text{M}^+)\text{CH}_3$ and $\text{CH}_3(\text{CH}_2)_y(\text{CHOSO}_3^- \text{M}^+)\text{CH}_2\text{CH}_3$ where x and (y + 1) are integers of at least about 7, preferably at least about 9, and M is a water-solubilizing cation, especially sodium; unsaturated sulfates such as oleyl sulfate; the C₁₀-C₁₈ alkyl alkoxy sulfates ("AE_xS") especially those wherein x is from 1 to about 7; C₁₀-C₁₈ alkyl alkoxy carboxylates (especially the EO 1-5 ethoxycarboxylates); the C₁₀-C₁₈ glycerol ethers; the C₁₀-C₁₈ alkyl polyglycosides and their corresponding sulfated polyglycosides; and C₁₂-C₁₈ alpha-sulfonated fatty acid esters. Deterative surfactants may be mixed in varying proportions for improved surfactancy as is well-known in the art. Also optionally included in the compositions are conventional nonionic and amphoteric surfactants such as the C₁₂-C₁₈ alkyl ethoxylates ("AE") including the so-called narrow peaked alkyl ethoxylates and C₆-C₁₂ alkyl phenol alkoxyates (especially

ethoxylates and mixed ethoxylate/ propoxylates), C₁₂-C₁₈ betaines and sulfobetaines ("sultaines"), C₁₀-C₁₈ amine oxides, and the like, can also be included in the cleaning compositions. The C₁₀-C₁₈ N-alkyl polyhydroxy fatty acid amides can also be used. Typical examples include the C₁₂-C₁₈ N-methylglucamides. See WO 9,206,154. Other sugar-derived surfactants include the N-alkoxy polyhydroxy fatty acid amides, such as C₁₀-C₁₈ N-(3-methoxypropyl) glucamide. The N-propyl through N-hexyl C₁₂-C₁₈ glucamides can be used for low sudsing. C₁₀-C₂₀ conventional soaps may also be employed. If high sudsing is desired, the branched-chain C₁₀-C₁₆ soaps may be used. Mixtures of anionic and nonionic surfactants are especially useful.

Builders - Detergent builders can optionally be included in the compositions herein to assist in controlling mineral hardness. Inorganic as well as organic builders can be used. Builders are typically used in fabric laundering compositions to assist in the removal of particulate soils.

The level of builder can vary widely depending upon the end use of the composition and its desired physical form. When present, the compositions will typically comprise at least about 0.1% builder.

Organic detergent builders suitable for the purposes of the present invention include, but are not restricted to, a wide variety of polycarboxylate compounds. As used herein, "polycarboxylate" refers to compounds having a plurality of carboxylate groups, preferably at least 3 carboxylates. Polycarboxylate builder can generally be added to the composition in acid form, but can also be added in the form of a neutralized salt or "overbased". When utilized in salt form, alkali metals, such as sodium, potassium, and lithium, or alkanolammonium salts are preferred.

Included among the polycarboxylate builders are a variety of categories of useful materials. One important category of polycarboxylate builders encompasses the ether polycarboxylates, including oxydisuccinate, as disclosed in Berg, U.S. Patent 3,128,287, issued April 7, 1964, and Lamberti et al, U.S. Patent 3,635,830, issued

January 18, 1972. See also "TMS/TDS" builders of U.S. Patent 4,663,071, issued to Bush et al, on May 5, 1987. Suitable ether polycarboxylates also include cyclic compounds, particularly alicyclic compounds, such as those described in U.S. Patents 3,923,679; 3,835,163; 4,158,635; 4,120,874 and 4,102,903.

Other useful detergency builders include the ether hydroxypolycarboxylates, copolymers of maleic anhydride with ethylene or vinyl methyl ether, 1,3,5-trihydroxy benzene-2,4,6-trisulfonic acid, and carboxymethyloxysuccinic acid, the various alkali metal, ammonium and substituted ammonium salts of polyacetic acids such as nitrilotriacetic acid, as well as polycarboxylates such as mellitic acid, succinic acid, oxydisuccinic acid, polymaleic acid, benzene 1,3,5-tricarboxylic acid, carboxymethyloxysuccinic acid, and soluble salts thereof.

Citrate builders, e.g., citric acid and soluble salts thereof (particularly sodium salt), are polycarboxylate builders of particular importance due to their availability from renewable resources and their biodegradability. Oxydisuccinates are also especially useful in such compositions and combinations.

Also suitable in the detergent compositions of the present invention are the 3,3-dicarboxy-4-oxa-1,6-hexanedioates and the related compounds disclosed in U.S. Patent 4,566,984, Bush, issued January 28, 1986. Useful succinic acid builders include the C₅-C₂₀ alkyl and alkenyl succinic acids and salts thereof. Specific examples of succinate builders include: laurylsuccinate, myristylsuccinate, palmitylsuccinate, 2-dodecenylylsuccinate (preferred), 2-pentadecenylylsuccinate, and the like. Laurylsuccinates are the preferred builders of this group, and are described in European Patent Application 86200690.5/0,200,263, published November 5, 1986.

Other suitable polycarboxylates are disclosed in U.S. Patent 4,144,226, Crutchfield et al, issued March 13, 1979 and in U.S. Patent 3,308,067, Diehl, issued March 7, 1967. See also U.S. Patent 3,723,322.

Fatty acids, e.g., C₁₂-C₁₈ monocarboxylic acids, can also be incorporated into the compositions alone, or in combination with the aforesaid builders, especially citrate and/or the succinate builders, to provide additional builder activity. Such use of fatty acids will generally result in a diminution of sudsing in laundry compositions, which may need to be taken into account by the formulator.

Where phosphorus-based builders can be used, and especially in hand-laundrying operations, the various alkali metal phosphates such as the well-known sodium tripolyphosphates, sodium pyrophosphate and sodium orthophosphate can be used. Phosphonate builders such as ethane-1-hydroxy-1,1-diphosphonate and other known phosphonates (see, for example, U.S. Patents 3,159,581; 3,213,030; 3,422,021; 3,400,148 and 3,422,137) can also be used though such materials are more commonly used in a low-level mode as chelants or stabilizers.

Inorganic or P-containing detergent builders include, but are not limited to, the alkali metal, ammonium and alkanolammonium salts of polyphosphates (exemplified by the tripolyphosphates, pyrophosphates, and glassy polymeric meta-phosphates), phosphonates, phytic acid, silicates, carbonates (including bicarbonates and sesquicarbonates), sulfates, and aluminosilicates.

Chelating Agents in addition to ATMP - The compositions herein may also optionally contain a transition-metal selective sequestrants or "chelating agents", e.g., iron and/or copper and/or manganese chelating agents, provided that such materials are compatible or suitably formulated. Chelating agents suitable for use herein can be selected from the group consisting of aminocarboxylates, phosphonates (especially the aminophosphonates), polyfunctionally-substituted aromatic chelating agents, and mixtures thereof. Without intending to be bound by theory, it is believed that the benefit of these materials is due in part to their exceptional ability to remove iron, copper and manganese ions from washing solutions by formation of soluble chelates; other benefits include inorganic film prevention or scale inhibition. Commercial chelating agents for use herein include the


DEQUEST® series, and chelants from Monsanto, DuPont, and Nalco, Inc.

Aminocarboxylates useful as optional chelating agents are further illustrated by ethylenediaminetetracetates, N-hydroxyethylethylenediaminetriacetates, nitrilotriacetates, ethylenediamine tetrapropionates, triethylenetetraaminehexacetates, diethylenetriaminepentaacetates, and ethanoldiglycines, alkali metal, ammonium, and substituted ammonium salts thereof. In general, chelant mixtures may be used for a combination of functions, such as multiple transition-metal control, long-term product stabilization, and/or control of precipitated transition metal oxides and/or hydroxides.

Polyfunctionally-substituted aromatic chelating agents are also useful in the compositions herein. See U.S. Patent 3,812,044, issued May 21, 1974, to Connor et al. Preferred compounds of this type in acid form are dihydroxydisulfobenzenes such as 1,2-dihydroxy-3,5-disulfobenzene.

A highly preferred biodegradable chelator for use herein is ethylenediamine disuccinate ("EDDS"), especially (but not limited to) the [S,S] isomer as described in U.S. Patent 4,704,233, November 3, 1987, to Hartman and Perkins. The trisodium salt is preferred though other forms, such as magnesium salts, may also be useful.

Another preferred chelator for use herein is of the formula:

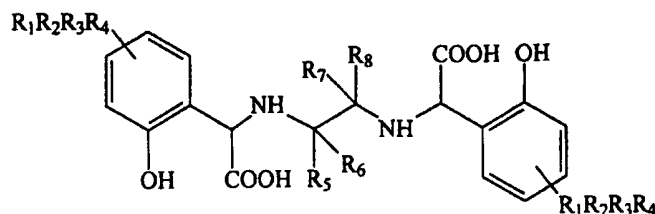

wherein R₁, R₂, R₃, and R₄ are independently selected from the group consisting of -H, alkyl, alkoxy, aryl, aryloxy, -Cl, -Br, -NO₂, -C(O)R', and -SO₂R''; wherein R' is selected from the group consisting of -H, -OH, alkyl, alkoxy, aryl, and aryloxy; R'' is selected from the group consisting of alkyl, alkoxy, aryl, and aryloxy; and R₅, R₆, R₇, and R₈ are independently selected from the group consisting of -H and alkyl.

Aminophosphonates are also suitable for use as chelating agents in the compositions of the invention when at least low levels of total phosphorus are permitted in detergent compositions, and include the ethylenediaminetetrakis (methylenephosphonates) and the diethylenetriaminepentakis (methylenephosphonates). Preferably, these aminophosphonates do not contain alkyl or alkenyl groups with more than about 6 carbon atoms.

If utilized, chelating agents or transition-metal-selective sequestrants will preferably comprise from about 0.001% to about 10%, more preferably from about 0.05% to about 1% by weight of the compositions herein.

Polymeric Soil Release Agent - Any polymeric soil release agent known to those skilled in the art can optionally be employed in the compositions and processes of this invention. Polymeric soil release agents are characterized by having both hydrophilic segments, to hydrophilize the surface of hydrophobic fibers, such as polyester and nylon, and hydrophobic segments, to deposit upon hydrophobic fibers and remain adhered thereto through completion of washing and rinsing cycles and, thus, serve as an anchor for the hydrophilic segments. This can enable stains occurring subsequent to treatment with the soil release agent to be more easily cleaned in later washing procedures.

The polymeric soil release agents useful herein especially include those soil release agents having: (a) one or more nonionic hydrophile components consisting essentially of (i) polyoxyethylene segments with a degree of polymerization of at least 2, or (ii) oxypropylene or polyoxypropylene segments with a degree of polymerization of from 2 to 10, wherein said hydrophile segment does not encompass any oxypropylene unit unless it is bonded to adjacent moieties at each end by ether linkages, or (iii) a mixture of oxyalkylene units comprising oxyethylene and from 1 to about 30 oxypropylene units wherein said mixture contains a sufficient amount of oxyethylene units such that the hydrophile component has hydrophilicity great enough to increase the hydrophilicity of conventional polyester synthetic fiber surfaces upon

deposit of the soil release agent on such surface, said hydrophile segments preferably comprising at least about 25% oxyethylene units and more preferably, especially for such components having about 20 to 30 oxypropylene units, at least about 50% oxyethylene units; or (b) one or more hydrophobe components comprising (i) C₃ oxyalkylene terephthalate segments, wherein, if said hydrophobe components also comprise oxyethylene terephthalate, the ratio of oxyethylene terephthalate:C₃ oxyalkylene terephthalate units is about 2:1 or lower, (ii) C₄-C₆ alkylene or oxy C₄-C₆ alkylene segments, or mixtures therein, (iii) poly (vinyl ester) segments, preferably polyvinyl acetate, having a degree of polymerization of at least 2, or (iv) C₁-C₄ alkyl ether or C₄ hydroxyalkyl ether substituents, or mixtures therein, wherein said substituents are present in the form of C₁-C₄ alkyl ether or C₄ hydroxyalkyl ether cellulose derivatives, or mixtures therein, and such cellulose derivatives are amphiphilic, whereby they have a sufficient level of C₁-C₄ alkyl ether and/or C₄ hydroxyalkyl ether units to deposit upon conventional polyester synthetic fiber surfaces and retain a sufficient level of hydroxyls, once adhered to such conventional synthetic fiber surface, to increase fiber surface hydrophilicity, or a combination of (a) and (b).

Typically, the polyoxyethylene segments of (a)(i) will have a degree of polymerization of from about 1 to about 200, although higher levels can be used, preferably from 3 to about 150, more preferably from 6 to about 100. Suitable oxy C₄-C₆ alkylene hydrophobe segments include, but are not limited to, end-caps of polymeric soil release agents such as $\text{MO}_3\text{S}(\text{CH}_2)_n\text{OCH}_2\text{CH}_2\text{O}-$, where M is sodium and n is an integer from 4-6, as disclosed in U.S. Patent 4,721,580, issued January 26, 1988 to Gosselink.

Polymeric soil release agents useful in the present invention also include cellulosic derivatives such as hydroxyether cellulosic polymers, copolymeric blocks of ethylene terephthalate or propylene terephthalate with polyethylene oxide or polypropylene oxide terephthalate, and the like. Such agents are commercially available and include hydroxyethers of cellulose such as METHOCEL (Dow). Cellulosic soil release agents for use herein also include those selected from the group consisting of C₁-

C₄ alkyl and C₄ hydroxyalkyl cellulose; see U.S. Patent 4,000,093, issued December 28, 1976 to Nicol, et al.

Soil release agents characterized by poly(vinyl ester) hydrophobe segments include graft copolymers of poly(vinyl ester), e.g., C₁-C₆ vinyl esters, preferably poly(vinyl acetate) grafted onto polyalkylene oxide backbones, such as polyethylene oxide backbones. See European Patent Application 0 219 048, published April 22, 1987 by Kud, et al. Commercially available soil release agents of this kind include the SOKALAN type of material, e.g., SOKALAN HP-22, available from BASF (West Germany).

One type of preferred soil release agent is a copolymer having random blocks of ethylene terephthalate and polyethylene oxide (PEO) terephthalate. The molecular weight of this polymeric soil release agent is in the range of from about 25,000 to about 55,000. See U.S. Patent 3,959,230 to Hays, issued May 25, 1976 and U.S. Patent 3,893,929 to Basadur issued July 8, 1975.

Another preferred polymeric soil release agent is a polyester with repeat units of ethylene terephthalate units contains 10-15% by weight of ethylene terephthalate units together with 90-80% by weight of polyoxyethylene terephthalate units, derived from a polyoxyethylene glycol of average molecular weight 300-5,000. Examples of this polymer include the commercially available material ZELCON 5126 (from Dupont) and MILEASE T (from ICI). See also U.S. Patent 4,702,857, issued October 27, 1987 to Gosselink.

Another preferred polymeric soil release agent is a sulfonated product of a substantially linear ester oligomer comprised of an oligomeric ester backbone of terephthaloyl and oxyalkyleneoxy repeat units and terminal moieties covalently attached to the backbone. These soil release agents are described fully in U.S. Patent 4,968,451, issued November 6, 1990 to J.J. Scheibel and E.P. Gosselink. Other suitable polymeric soil release agents include the terephthalate polyesters of U.S. Patent 4,711,730, issued December 8, 1987 to Gosselink et al, the anionic end-capped oligomeric esters of U.S. Patent 4,721,580, issued

January 26, 1988 to Gosselink, and the block polyester oligomeric compounds of U.S. Patent 4,702,857, issued October 27, 1987 to Gosselink.

Preferred polymeric soil release agents also include the soil release agents of U.S. Patent 4,877,896, issued October 31, 1989 to Maldonado et al, which discloses anionic, especially sulfoaroyl, end-capped terephthalate esters.

Still another preferred soil release agent is an oligomer with repeat units of terephthaloyl units, sulfoisoterephthaloyl units, oxyethyleneoxy and oxy-1,2-propylene units. The repeat units form the backbone of the oligomer and are preferably terminated with modified isethionate end-caps. A particularly preferred soil release agent of this type comprises about one sulfoisophthaloyl unit, 5 terephthaloyl units, oxyethyleneoxy and oxy-1,2-propyleneoxy units in a ratio of from about 1.7 to about 1.8, and two end-cap units of sodium 2-(2-hydroxyethoxy)-ethanesulfonate. Said soil release agent also comprises from about 0.5% to about 20%, by weight of the oligomer, of a crystalline-reducing stabilizer, preferably selected from the group consisting of xylene sulfonate, cumene sulfonate, toluene sulfonate, and mixtures thereof. See U.S. Pat. No. 5,415,807, issued May 16, 1995, to Gosselink et al.

If utilized, soil release agents will generally comprise from about 0.01% to about 10.0%, by weight, of the detergent compositions herein, typically from about 0.1% to about 5%, preferably from about 0.2% to about 3.0%.


Other Ingredients - Detersive ingredients or adjuncts optionally included in the instant compositions can include one or more materials for assisting or enhancing cleaning performance, treatment of the substrate to be cleaned, or designed to improve the aesthetics of the compositions. Such materials are further illustrated in U.S. Pat. No. 3,936,537, Baskerville et al. Adjuncts which can also be included in compositions of the present invention, in their conventional art-established levels for use (generally from 0% to about 20% of the detergent ingredients, preferably from about 0.5% to about 10%),

include other active ingredients such as dispersant polymers from BASF Corp. or Rohm & Haas; anti-tarnish and/or anti-corrosion agents, dyes, fillers, optical brighteners, germicides, hydrotropes, enzyme stabilizing agents, perfumes, solubilizing agents, clay soil removal/anti-redeposition agents, carriers, processing aids, pigments, solvents, fabric softeners, static control agents, etc.

Dye Transfer Inhibiting Agents - The compositions of the present invention may also include one or more materials effective for inhibiting the transfer of dyes from one dyed surface to another during the cleaning process. Generally, such dye transfer inhibiting agents include polyvinyl pyrrolidone polymers, polyamine N-oxide polymers, copolymers of N-vinylpyrrolidone and N-vinylimidazole, manganese phthalocyanine, peroxidases, and mixtures thereof. If used, these agents typically comprise from about 0.01% to about 10% by weight of the composition, preferably from about 0.01% to about 5%, and more preferably from about 0.05% to about 2%.

More specifically, the polyamine N-oxide polymers preferred for use herein contain units having the following structural formula: $R-A_x-P$; wherein P is a polymerizable unit to which an N-O group can be attached or the N-O group can form part of the polymerizable unit or the N-O group can be attached to both units; A is one of the following structures: $-NC(O)-$, $-C(O)O-$, $-S-$, $-O-$, $-N=$; x is 0 or 1; and R is aliphatic, ethoxylated aliphatics, aromatics, heterocyclic or alicyclic groups or any combination thereof to which the nitrogen of the N-O group can be attached or the N-O group is part of these groups. Preferred polyamine N-oxides are those wherein R is a heterocyclic group such as pyridine, pyrrole, imidazole, pyrrolidine, piperidine and derivatives thereof.

The N-O group can be represented by the following general structures:

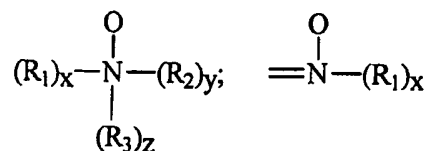

wherein R_1 , R_2 , R_3 are aliphatic, aromatic, heterocyclic or alicyclic groups or combinations thereof; x , y and z are 0 or 1; and the nitrogen of the N-O group can be attached or form part of any of the aforementioned groups. The amine oxide unit of the polyamine N-oxides has a $pK_a < 10$, preferably $pK_a < 7$, more preferred $pK_a < 6$.

Any polymer backbone can be used as long as the amine oxide polymer formed is water-soluble and has dye transfer inhibiting properties. Examples of suitable polymeric backbones are polyvinyls, polyalkylenes, polyesters, polyethers, polyamide, polyimides, polyacrylates and mixtures thereof. These polymers include random or block copolymers where one monomer type is an amine N-oxide and the other monomer type is an N-oxide. The amine N-oxide polymers typically have a ratio of amine to the amine N-oxide of 10:1 to 1:1,000,000. However, the number of amine oxide groups present in the polyamine oxide polymer can be varied by appropriate copolymerization or by an appropriate degree of N-oxidation. The polyamine oxides can be obtained in almost any degree of polymerization. Typically, the average molecular weight is within the range of 500 to 1,000,000; more preferred 1,000 to 500,000; most preferred 5,000 to 100,000. This preferred class of materials can be referred to as "PVNO". The most preferred polyamine N-oxide useful in the detergent compositions herein is poly(4-vinylpyridine-N-oxide) which has an average molecular weight of about 50,000 and an amine to amine N-oxide ratio of about 1:4.

Copolymers of N-vinylpyrrolidone and N-vinylimidazole polymers (referred to as a class as "PVPVI") are also preferred for use herein. Preferably the PVPVI has an average molecular weight range from 5,000 to 1,000,000, more preferably from 5,000 to 200,000, and most preferably from 10,000 to 20,000. (The average molecular weight range is determined by light scattering as described in Barth, et al., Chemical Analysis, Vol 113. "Modern Methods of Polymer Characterization", the disclosures of which are incorporated herein by reference.) The PVPVI copolymers typically have a molar ratio of N-vinylimidazole to N-vinylpyrrolidone from 1:1 to 0.2:1, more preferably from 0.8:1 to 0.3:1, most preferably from 0.6:1 to 0.4:1. These copolymers can be either linear or branched.

The present invention compositions also may employ a polyvinylpyrrolidone ("PVP") having an average molecular weight of from about 5,000 to about 400,000, preferably from about 5,000 to about 200,000, and more preferably from about 5,000 to about 50,000. PVP's are known to persons skilled in the detergent field; see, for example, EP-A-262,897 and EP-A-256,696, incorporated herein by reference. Compositions containing PVP can also contain polyethylene glycol ("PEG") having an average molecular weight from about 500 to about 100,000, preferably from about 1,000 to about 10,000. Preferably, the ratio of PEG to PVP on a ppm basis delivered in wash solutions is from about 2:1 to about 50:1, and more preferably from about 3:1 to about 10:1.

Suds Boosters - If high sudsing is desired, suds boosters such as C₁₀-C₁₆ alkanolamides can be incorporated into the compositions, typically at 1%-10% levels. The C₁₀-C₁₄ monoethanol and diethanol amides illustrate a typical class of such suds boosters. Use of such suds boosters with high sudsing adjunct surfactants such as the amine oxides, betaines and sultaines noted above is also advantageous. If desired, soluble magnesium salts such as MgCl₂, MgSO₄, and the like, can be added at levels of, for example, 0.1%-2%, to provide additional suds and to enhance grease removal performance.

Brightener - Any optical brighteners, fluorescent whitening agents or other brightening or whitening agents known in the art can be incorporated in the instant compositions when they are designed for fabric treatment or laundering, at levels typically from about 0.05% to about 1.2%, by weight, of the detergent compositions herein. Commercial optical brighteners which may be useful in the present invention can be classified into subgroups, which include, but are not necessarily limited to, derivatives of stilbene, pyrazoline, coumarin, carboxylic acids, methinecyanines, dibenzothiophene-5,5-dioxide, azoles, 5- and 6-membered-ring heterocyclic brighteners, this list being illustrative and non-limiting. Examples of such brighteners are disclosed in "The Production and Application of Fluorescent Brightening Agents", M. Zahradnik, Published by John Wiley & Sons, New York (1982).

Specific examples of optical brighteners which are useful in the present compositions are those identified in U.S. Patent 4,790,856, issued to Wixon on December 13, 1988. These brighteners include the PHORWHITE series of brighteners from Verona. Other brighteners disclosed in this reference include: Tinopal UNPA, Tinopal CBS and Tinopal 5BM; available from Ciba-Geigy; Artic White CC and Artic White CWD, available from Hilton-Davis, located in Italy; the 2-(4-styryl-phenyl)-2H-naphthol[1,2-d]triazoles; 4,4'-bis-(1,2,3-triazol-2-yl)-stilbenes; 4,4'-bis(styryl)bisphenyls; and the aminocoumarins. Specific examples of these brighteners include 4-methyl-7-diethyl- amino coumarin; 1,2-bis(-benzimidazol-2-yl)ethylene; 2,5-bis(benzoxazol-2-yl)thiophene; 2-styryl-naphth-[1,2-d]oxazole; and 2-(stilbene-4-yl)-2H-naphtho- [1,2-d]triazole. See also U.S. Patent 3,646,015, issued February 29, 1972 to Hamilton. Anionic brighteners are typically preferred herein.

Bleach catalysts - If desired, compositions herein may additionally incorporate a catalyst or accelerator to further improve bleaching or soil removal. Any suitable bleach catalyst can be used. For detergent compositions used at a total level of from about 1,000 to about 5,000 ppm in water, the composition will typically deliver a concentration of from about 0.1 ppm to about 700 ppm, more preferably from about 1 ppm to about 50 ppm, or less, of the catalyst species in the wash liquor.

Typical bleach catalysts comprise a transition-metal complex, for example one wherein the metal co-ordinating ligands are quite resistant to labilization and which does not deposit metal oxides or hydroxides to any appreciable extent under the typically alkaline conditions of washing. Such catalysts include manganese-based catalysts disclosed in U.S. Pat. 5,246,621, U.S. 5,244,594; U.S. 5,194,416; U.S. 5,114,606; and EP Nos. 549,271 A1, 549,272 A1, 544,440 A2, and 544,490 A1; preferred examples of these catalysts include $\text{Mn}^{\text{IV}}_2(\mu\text{-O})_3(\text{TACN})_2(\text{PF}_6)_2$, $\text{Mn}^{\text{III}}_2(\mu\text{-O})_1(\mu\text{-OAc})_2(\text{TACN})_2(\text{ClO}_4)_2$, $\text{Mn}^{\text{IV}}_4(\mu\text{-O})_6(\text{TACN})_4(\text{ClO}_4)_4$, $\text{Mn}^{\text{III}}\text{Mn}^{\text{IV}}_4(\mu\text{-O})_1(\mu\text{-OAc})_2(\text{TACN})_2(\text{ClO}_4)_3$, $\text{Mn}^{\text{IV}}(\text{TACN})_3(\text{OCH}_3)_3(\text{PF}_6)_3$, and mixtures thereof wherein TACN is trimethyl-1,4,7-triazacyclononane or an equivalent macrocycle; though

alternate metal-co-ordinating ligands as well as mononuclear complexes are also possible and monometallic as well as di- and polymetallic complexes and complexes of alternate metals such as iron or ruthenium are all within the present scope. Other metal-based bleach catalysts include those disclosed in U.S. Pat. 4,430,243 and U.S. Pat. 5,114,611. The use of manganese with various complex ligands to enhance bleaching is also reported in the following United States Patents: 4,728,455; 5,284,944; 5,246,612; 5,256,779; 5,280,117; 5,274,147; 5,153,161; and 5,227,084.

Transition metals may be precomplexed or complexed *in-situ* with suitable donor ligands selected in function of the choice of metal, its oxidation state and the denticity of the ligands. Other complexes which may be included herein are those of U.S. Application Ser. No. 08/210,186, filed March 17, 1994.

Pretreater Formulation - The preferred compositions of the present invention are liquid, they have a viscosity 1 cps or greater at 20°C when measured with a Brookfield viscometer at 50 rpm with a spindle n°3, more preferably of from about 50 to about 2000 cps, and still more preferably of from about 200 to about 1500 cps. Any surfactant system or polymeric thickener known in the art to increase the viscosity of a composition can be used to achieve the preferred viscosity. Thus the surfactants suitable to be used herein may be thickening surfactants such as nonionic, anionic, cationic, zwitterionic and/or amphoteric surfactants.

The liquid bleaching composition herein comprise water in any amount up to about 98% by weight of the total composition. Preferably, the compositions herein will comprise from about 5% to about 98%, more preferably from about 10% to about 95%, by weight of the bleaching composition, of water.

When the liquid peroxygen bleach-containing compositions according to the present invention further comprise an optional bleach activator, it is highly desired herein to formulate said compositions either as a microemulsion or as a stable emulsion.

When formulated as a microemulsion, the composition comprises the bleach activator in a matrix of water, the peroxygen bleach, and hydrophilic anionic and nonionic surfactants. Suitable anionic surfactants herein include the alkyl benzene sulfonates, alkyl sulfates, alkyl alkoxyated sulfates, and mixtures thereof. Suitable nonionic surfactants for use in the microemulsions herein include the hydrophilic nonionic surfactants as defined hereinafter for the emulsions according to the present invention.

When formulated as an emulsion, the composition comprises at least a hydrophilic surfactant having an HLB (hydrophilic-lipophilic balance) above 10 and at least a hydrophobic surfactant having an HLB up to 9, wherein said bleach activator is emulsified by said surfactants. The two different surfactants in order to form emulsions which are stable must have different HLB values, and preferably the difference in value of the HLBs of said two surfactants is at least 1, preferably at least 3. In other words, by appropriately combining at least two of said surfactants with different HLBs in water, stable emulsions will be formed, i.e. emulsions which do not substantially separate into distinct layers, upon standing for at least two weeks at 40 °C, preferably 50 °C. The emulsions comprise from about 2 % to about 50%, by weight of the total composition, of said hydrophilic and hydrophobic surfactants, preferably from about 5% to about 40%, and more preferably from about 8% to about 30%. The emulsions comprise at least about 0.1%, preferably at least 3%, more preferably at least 5%, by weight of the total emulsion, of one or more hydrophobic surfactant and at least about 0.1%, preferably at least 3%, more preferably at least 5%, by weight of the total emulsion, of one or more hydrophilic surfactant. Preferred to be used herein are the hydrophobic nonionic surfactants and hydrophilic nonionic surfactants. Said hydrophobic nonionic surfactants to be used herein have an HLB up to 9, preferably below 9, more preferably below 8 and said hydrophilic surfactants have an HLB above 10, preferably above 11, more preferably above 12. Suitable nonionic surfactants for use herein include alkoxyated fatty alcohols, preferably fatty alcohol ethoxylates and/or propoxylates. A variety of alkoxyated fatty alcohols are commercially available which have very different HLB values. For further discussion of HLB theory and

surfactants and hydrophilic nonionic surfactants. Said hydrophobic nonionic surfactants to be used herein have an HLB up to 9, preferably below 9, more preferably below 8 and said hydrophilic surfactants have an HLB above 10, preferably above 11, more preferably above 12. Suitable nonionic surfactants for use herein include alkoxyated fatty alcohols, preferably fatty alcohol ethoxylates and/or propoxylates. A variety of alkoxyated fatty alcohols are commercially available which have very different HLB values. For further discussion of HLB theory and its application to the formation of emulsions, please see the: *Encyclopedia of Emulsion Technology*; Becher, P., Ed.; Marcel Dekker, Inc.: New York, 1985; Volumes 1 and 2, and references cited therein.

In a particularly preferred embodiment of the emulsion, if present, wherein the emulsions comprise acetyl triethyl citrate as the bleach activator, an adequate nonionic surfactant system would comprise a hydrophobic nonionic surfactant with, for instance, an HLB of 6, such as a Dobanol^R 23-2 and a hydrophilic nonionic surfactant with, for instance, an HLB of 15, such as a Dobanol^R 91-10. Other suitable nonionic surfactant systems comprise for example a Dobanol^R 23-6.5 (HLB about 12) and a Dobanol^R 23 (HLB below 6) or a Dobanol^R 45-7 (HLB=11.6) and Lutensol^R TO3 (HLB=8). Dobanol^R are commercially available nonionic surfactants available from Shell Corp. Lutensol^R are commercially available nonionic surfactants available from BASF Corp.

The peroxygen bleach-containing compositions according to the present invention may further comprise an amine oxide surfactant according to the formula $R_1R_2R_3NO$, wherein each of R_1 , R_2 and R_3 is independently a C6-C30, preferably a C10-C30, most preferably a C12-C16 hydrocarbon chain. It has been further observed that in a pretreatment process, the presence of said amine oxide further improves the cleaning performance on particulate and/or greasy stains. It is believed that this improvement in cleaning performance is matrix independent. To obtain either of these benefits, amine oxides, if present, should be present in amounts ranging from 0.1% to 10 % by weight of the total composition, preferably from 1.5% to 3%.

The following examples illustrate the compositions of this invention, but are not intended to be limiting thereof. All materials in the Examples satisfy the functional limitations herein.

Formulation I

Na Alkylsulphate	2.0
Dobanol ® 45-7	6.5
Dobanol ® 23-3	8.5
ATC	3.5
H ₂ O ₂	4.0
BHT	0.05
ATMP	0.15
H ₂ SO ₄ up to pH 4	
water	balance to 100%

Formulation II

Na Alkylsulphate	12.0
Dobanol ® 45-7	6.0
Dobanol ® 23-6.5	6.0
ATC	3.5
H ₂ O ₂	6.0
BHT	0.05
ATMP	0.15
Propanediol	3.0
H ₂ SO ₄ up to pH 4	
water	balance to 100%

Formulation III

Na Alkylsulphate	1.5
Dobanol ® 45-7	1.5
Dobanol ® 91-10	1.5
H ₂ O ₂	7.0
BHT	0.02
ATMP	0.02
Citric Acid	0.02
H ₂ SO ₄ up to pH 4	
water	balance to 100%

What is claimed is:

1. A bleaching composition comprising an effective amount of a peroxygen bleach and ATMP.
2. A composition according to claim 1, which is a liquid composition, preferably an aqueous liquid.
3. A composition according to claim 2 which has a pH of from greater than 0 to about 6 and a viscosity of 1 cps or greater, preferably from about 50 cps to about 2000 cps at 20°C when measured with a Brookfield viscometer at 50 rpm with a spindle n°3.
4. A composition according to any of the preceding claims which comprises from about 0.005% to about 5%, by weight of the total composition of ATMP.
5. A composition according to any of the preceding claims wherein said peroxygen bleach is hydrogen peroxide or a water soluble source thereof and is present in an amount of from about 0.5% to about 20% by weight of the total composition.
6. A composition according to any of the preceding claims, which further comprises from about 0.5% to about 20% by weight of the total composition of a bleach activator.
7. A composition according to claim 6 wherein said bleach activator is selected from the group consisting of ATC, NOBS, n-octanoyl caprolactam, 3,5,5-trimethylhexanoyl caprolactam, nonanoyl caprolactam, decanoyl caprolactam, n-octanoyl valerolactam, 3,5,5-trimethylhexanoyl valerolactam, nonanoyl valerolactam and mixtures thereof.

8. A composition according to claim 6 or 7, wherein said composition is formulated as a microemulsion of said bleach activator in a matrix comprising water, said peroxygen bleach, and a hydrophilic surfactant system comprising an anionic and a nonionic surfactant.
9. An aqueous bleaching composition according to claims 6 or 7, said composition being formulated as an aqueous emulsion comprising at least a hydrophilic surfactant having an HLB above 10 and at least a hydrophobic surfactant having an HLB up to 9, wherein said bleach activator is emulsified by said surfactants.
10. A process for pretreating soiled fabrics with a composition according to any of claims 2 to 9, said process comprising the steps of applying said composition onto the fabric and allowing said composition to remain in contact with said fabric before said fabric is washed.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/16380

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :C11D 7/08, 7/18, 7/38 US CL :510/303, 309, 337, 361, 372, 375, 480 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 510/303, 309, 337, 361, 372, 375, 480 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched NONE Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) APS search terms: peroxygen bleach, perborate, percarbonate, NMTP, aminotrimethylene phosphonic acid		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,229,028 A (BOUTIQUE ET AL) 20 July 1993, See Abstract; column 4, lines 40-50; column 5, lines 1-14.	1-3
X	US 5,275,753 A (DE BUZZACCARINI ET AL) 04 January 1994, See Abstract; column 4, lines 45-58; column 5, lines 39-43; column 6, lines 28-40.	1, 2
X	US 5,445,756 A (DIDIER ET AL) 29 August 1995, See Abstract; column 2, lines 40-55; column 3, lines 10-25; column 7, line 40 to column 8, line 45.	1, 2
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* "A" "B" "L" "O" "P"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance earlier document published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	"T" "X" "Y" "Z" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art document member of the same patent family
Date of the actual completion of the international search 23 OCTOBER 1997		Date of mailing of the international search report 20 JAN 1998
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer GREGORY R. DEL COTTO Telephone No. (703) 308-0661

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/16380**Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)**

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 4-10
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.